

OSRAM

IC-CPD

BATTERYcharge 7 pin portable

Model No.: OPC20F85

Input/Output: Max 16A 230V a.c. 50Hz

IP Grade(Function Box): IP65

Operation Temperature: -25°C to 45°C

Rated residual operating current I_{DR} : 30mA

Rated residual non-operating current I_{DN} : 15mA

Rated DC residual operating current: 6mA






Read the instructions



Risk of Electric Shock



EV Charging Only

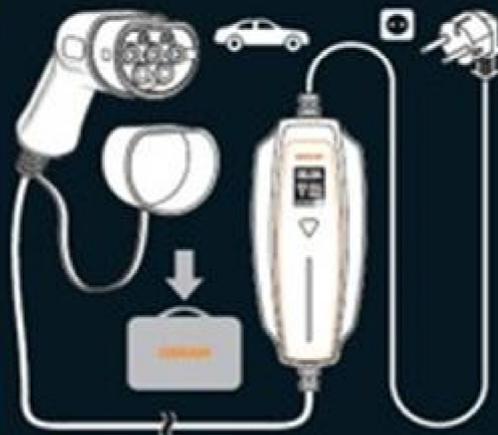

Manufactured by:

Ring Automotive Limited
Gelderd Road, Leeds, LS12 6NA, United Kingdom

Telephone +44 (0)113 213 2000

Fax +44 (0)113 231 0266

Email autosales@ringautomotive.com

www.ringautomotive.com

WWW.OSRAM.COM

Imported by:

OSRAM GmbH

Nonnendammallee 44

13629 Berlin, Germany

automotive-service@osram.com

Made in China

